




MX2000 Glovebox

MX2000 is a modular **glovebox** system that can be configured to meet your specific process requirements and productivity goals with any combination of ovens and antechambers, gas analyzers, moisture monitors, and environmental chambers and controls.

KEY FEATURES

- Wide choice of control capabilities ensures your process and budget needs are met
- A range of vacuum pumps – dry, rotary vane, turbo- molecular – to meet your antechamber or oven requirements
- Large window for excellent visibility and maintenance access
- Optional PLC for glovebox components is quickly programmed with easy-to-use software
- Sturdy, rugged construction for long equipment life and stable process platform
- Optional single or dual-column gas purification units deliver ultra-low moisture and oxygen levels
- Modular design enables economical glovebox customization for new systems, as well as easy upgrades as your process needs evolve


TYPICAL APPLICATIONS

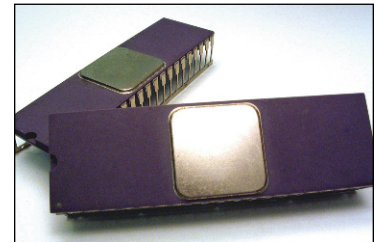

Semiconductor components



Seam weld thin film

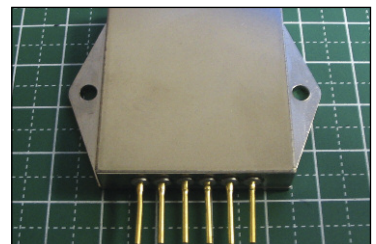

Seam sealed package

GLOVEBOX SPECIFICATIONS & OPTIONS

Features	
Antechambers and ovens	
Configuration options	End, front, rear loading
Heating	Wall heating or heated shelves
Temperature	125°C or 200°C, higher available
Vacuum pumps	Rotary vane, dry, or turbo pumps
Analysis and monitoring capabilities	
Oxygen detection range	0-1000 PPM or %
Moisture detection range	0-150 PPM or ° C dewpoint
Helium monitoring	%
Argon Monitoring	%
Utilities	
Electrical	208-240 VAC, single-phase, 50/60 Hz, 30 amps (40 amps with two ovens)

Specifications are subject to change without notice.

Features	
Inputs	
Environmental gas	60 psi (415 kPa)
Chilled water needed for oven flange cooling for 200° oven Not required with optional water re-circulator	
Gas purification	
Single column	30 CFM (51 m3/hr)
Dual column	Moisture and/or oxygen removal
Automatic dual column	
Gas mixers	
Manual set mixers	Two and three gas versions
Others	
Soot removal systems	30 CFM (51 m3/hr) or 100 CFM (170 m3/hr)
CDRH Class 1 laser eyesafe window	Wavelength based on application
Light tower	Indicates glovebox or process status
Tool interchange	Floor access, front loading
Safety	Light curtain, interlocks


MX2000 – ANTECHAMBERS AND OVENS

Interior Size	Type	Control choices for vacuum, backfill, and temperature	Temperature
Length 355 mm (14 in) Width 195 mm (7.625 in) Height 195 mm (7.625 in)	Antechamber	<ul style="list-style-type: none"> Flushing with manual set rotometer Manual Programmable logic control 	Not applicable
Length 465 mm (18.5 in) Width 290 mm (11.5 in) Height 265 mm (10.5 in)	Antechamber	<ul style="list-style-type: none"> Manual Programmable logic control 	Not applicable
Length 355 mm (14 in) Width 195 mm (7.625 in) Height 195 mm (7.625 in)	Oven-wall heat	<ul style="list-style-type: none"> Manual Programmable logic control 	125° or 200° C
Length 465 mm (18.5 in) Width 290 mm (11.5 in) Height 265 mm (10.5 in)	Oven-wall heat	<ul style="list-style-type: none"> Manual Programmable logic control 	200° C
Length 465 mm (18.5 in) Width 290 mm (11.5 in) Height 265 mm (10.5 in) Shelf length 455 mm (18 in)	Oven-heated shelves	<ul style="list-style-type: none"> Manual Programmable logic control 	200° or 300° C

Other antechambers and ovens available




Heated wall oven



Heated wall oven



Heated shelf oven



Antechamber

WEIGHT & DIMENSIONS (STANDARD GLOVEBOX SIZES)

	MX2000 - 48 in	MX2000 - 56 in
Dimensions (L x W x H)	39 in x 48 in x 36 in (965 mm x 1219 mm x 914 mm)	39 in x 56 in x 36 in (965 mm x 1423 mm x 914 mm)
Number of glove ports	2	4
Weight	Weight varies with selected options	

Other configurations and custom sizes available



1820 S. Myrtle Ave. • Monrovia, CA 91016 US
T: (626) 303-5676 • F: (626) 358-8048
info@amadamiyachi.com • www.amadamiyachi.com
ISO 9001 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMADA MIYACHI AMERICA, INC.

AMERICAS
Amada Miyachi
America Midwest
Wixom, MI 48393
T: (248) 313-3078
midwestsales@amadamiyachi.com

Amada Miyachi do
Brasil Ltda.
Sao Paulo, Brasil
T: +55-11-4193-3607
antonio.ruiz@amadamiyachi.com

EUROPE
Amada Miyachi
Europe GmbH
Puchheim, Germany
T: +49 (0) 89 83 94 030
infode@amadamiyachi.eu

ASIA
Amada Miyachi Co., Ltd.
Noda, 278-0016 Japan
T: +81-4-7125-6177
sales@miyachi.com

Amada Miyachi
Shanghai, Co., Ltd.
Shanghai, China
T: +86-21-6448-6000
zqzhang@msc.miyachi.com

Amada Miyachi
Korea Co., Ltd.
Gyeonggi-do, Korea
T: +82-31-8015-6810
dykim@mkc.miyachi.com

Amada Miyachi
Taiwan Co., Ltd.
Taipei, Taiwan R.O.C.
T: 886-2-2397-4778
keigaku@miyachi.com

Amada Miyachi
(Thailand) Co., Ltd.
Samutprakarn, Thailand
T: +66-2751-9337-8
info@mtl.miyachi.com

Amada Miyachi
Vietnam Co., Ltd.
Ho Chi Minh City, Vietnam
T: +84-8-3771-7972

Amada Miyachi
India Pvt., Ltd.
Bangalore, Karnataka
T: 080-4092-1749 & 3549
info@miyachiindia.com

Amada Miyachi
America Mexico
El Paso, TX 79925
T: (915) 881-8765
mxsales@amadamiyachi.com

MIYACHI UNITEK | MIYACHI PECO | MIYACHI EAPRO

follow us on:



Specifications subject to change without notice. Copyright© 2015 Amada Miyachi America, Inc. The material contained herein cannot be reproduced or used in any other way without the express written permission of Amada Miyachi America, Inc. All rights reserved.